




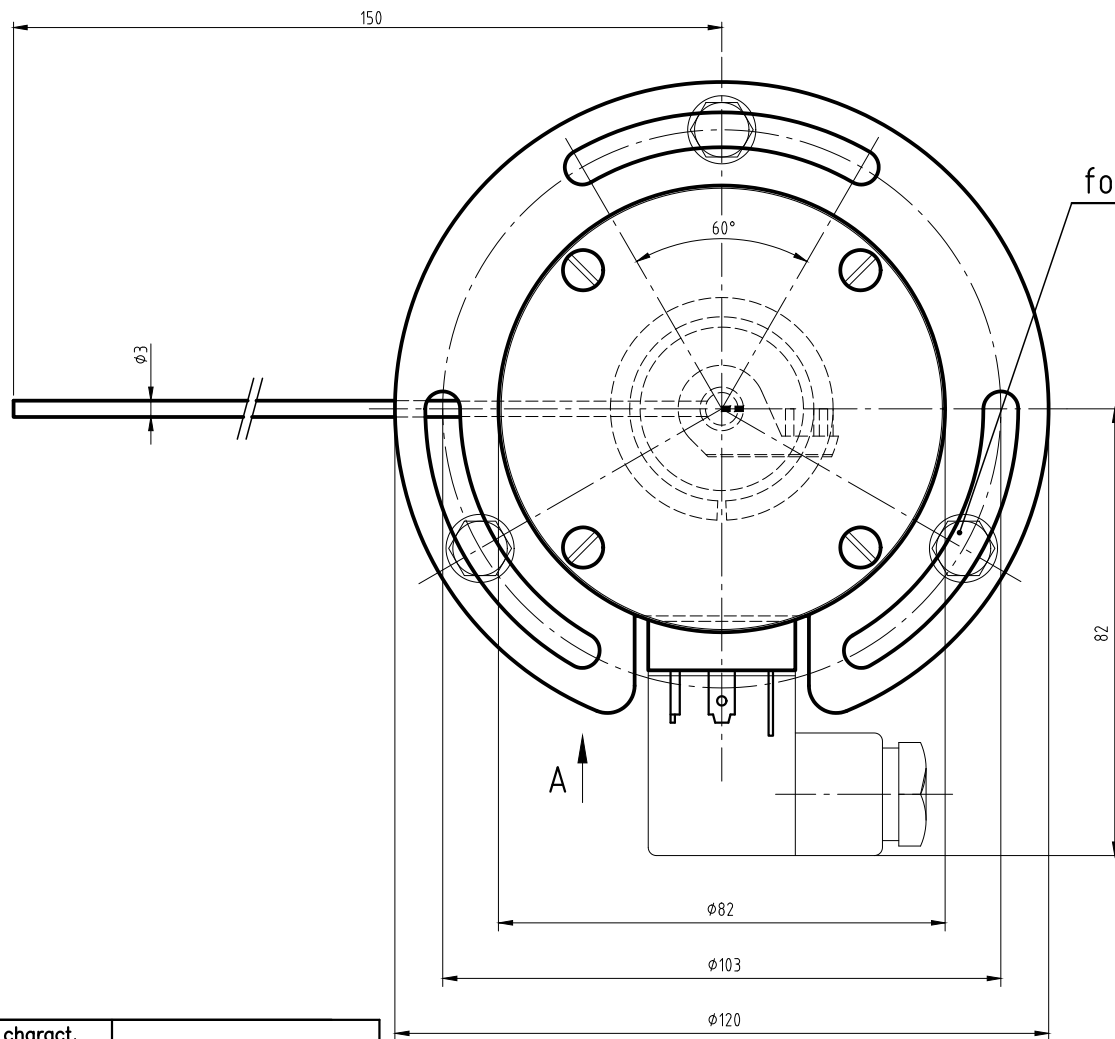


for M6 screws

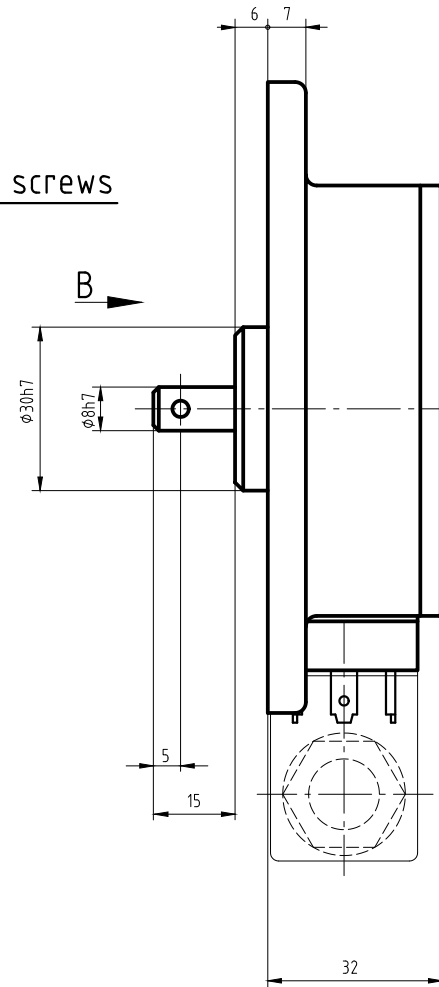


View from B



View A

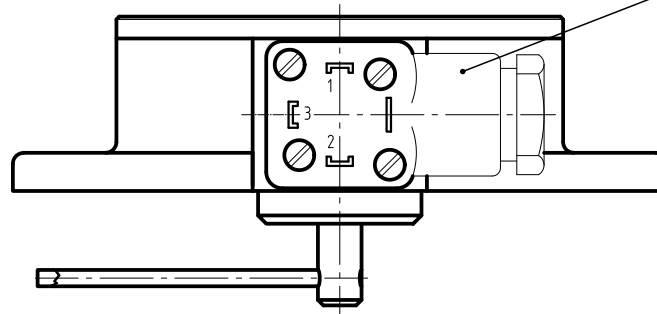

hydraulics plug GDM

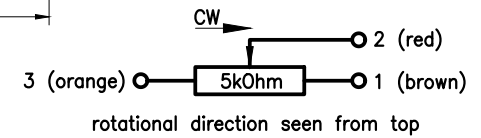

Electrical charact.	
Resistance value	5kOhm, conductive plastic
Resistance tolerance	+/- 20%
Linearity, indep.	+/- 0.25%
Power rating	1.5 W at 40°C, 0 at 80°C
Dielectric strength	500 VDC
Insulation resistance	> 10 MOhm
Wiper current	< 0.1 uA
Mechanical charact.	
Measuring range	355°, +/- 2°, rotatable
Protection class	IP 65
Temperature range	-30° bis +80°
Weight	~500g

				Oberfläche		Maßstab 1:1	Position	Menge
h	Widerstandstoleranz neu	07.03.11	MK	Datum	Name	Rotary potentiometer, with operation rod DP 120 CP		
g	neues Widerstandselement	05.05.02	TZ	Bearb.	22.09.1998			
f	neu gezeichnet	22.09.98	Th	Gepr.				
e	A=3, C=1, B bleibt 2		Th	Norm				
d	Schleiferposition		Th			120-004Eh		
c	Ø30 auf 6 verlängert							
b	Stab Ø3mm		Th					
a	reduz. Höhe, Speiche		Th					
Zust.	Änderung	Datum	Name	Dateiname	D:\DWG DP120\120-004E.dwg			

GENG
&THOMA
AG OH-2543 Lengnau/Blai