


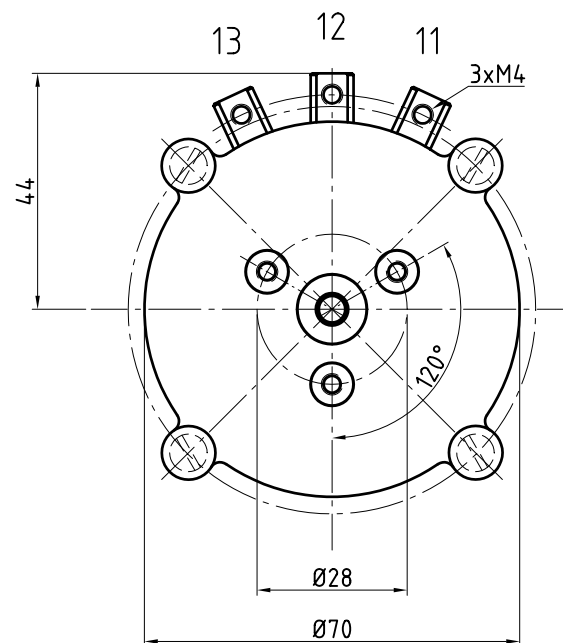


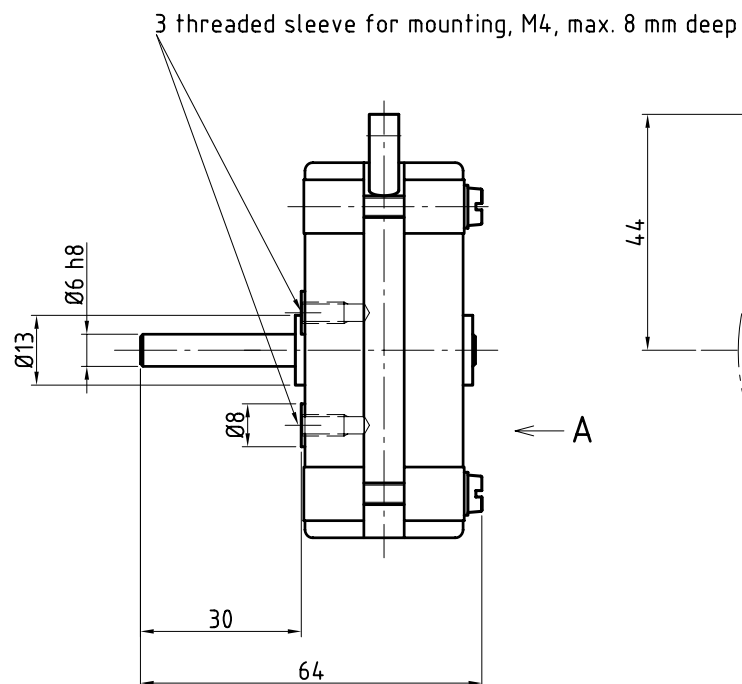

View from A

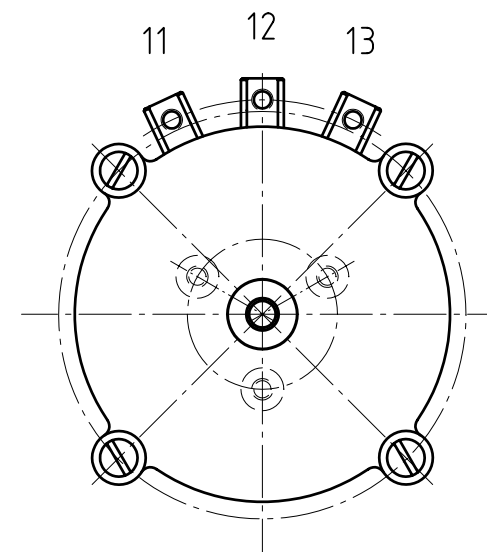

Electrical characteristics	
Resistance value	1 kOhm, 5kOhm conductive plastic
Resistance tolerance	+/- 20 %
Linearity, indep.	+/- 0.25 %
Power rating	1.5 W at 40°C, 0 W at 80°C
Dielectric strength	500 V DC
Insulation resistance	> 10 MOhm
Wiper current	< 1 uA
Mechanical characteristics	
Measuring range	355°, (360° rotatable)
Temperature range	-30°C till + 80°C
Weight	195 g



				Oberfläche	Maßstab 1:1	Position -	Menge -
				Datum	Name		
				Bearb. 30.09.1999	TH		
				Gepr.			
				Norm			
d	ohne Schrauben	20.05.09	MK				
c	Neues Widerstandselement	04.05.04	TZ				
b	5 kOhm neu	26.04.01	TH				
a	erg. mit Wid.-st. Symbol	26.9.2000	TH				
Zust.	Änderung	Datum	Name	Dateiname	E:\Dwg\DP70\70-006d.dwg		

Pot.-Meter mit Schraubanschluss		Blatt -
DP 70 CP		Bl
70-006E d		26.09.2000